



## ELECTRIC SUBMERSIBLE DRAINAGE PUMP

### G-900 SERIES

**PORTABLE ELECTRIC  
SUBMERSIBLE PUMP FOR  
CORROSIVE & ABRASIVE  
APPLICATIONS**

.....

#### **Model G-902T**

**8" (200mm) NPT or Hose  
35 HP (26kW)  
(High Volume - Low Head)**

.....

#### **Model G-906T**

**6" (150mm) NPT or Hose  
35 HP (26kW)  
(Low Volume - High Head)**

.....



### G-900 DESIGN ADVANTAGES

- Stainless Steel Strainer, Shaft, Impeller, Outlet and Hardware for maximum corrosion resistance.
- Choice of impeller materials:
  - 1) 304/316 Stainless Steel for sea water and corrosive applications and;
  - 2) Nitride Hardened 410 Stainless Steel for abrasive applications. (Standard)
- Tandem Tungsten Carbide/Tungsten Carbide and Tungsten Carbide/Tungsten Carbide mechanical seals.
- Mechanical Seals in wholly enclosed pressure compensated oil chamber.
- Field adjustable Nitrile Rubber-lined Diffuser/Wear Plate Optimizes efficiency throughout the life of the pump.
- Automatic ON/OFF/ON Thermal Overloads embedded in Stator Winding Optional - requires 6 core or Control cable and external controls.
- Equipped with Sacrificial Zinc Anodes for maximum life in a saline fluid environment.
- Available in complete 316 Stainless Steel Construction with Silicon Carbide/Silicon Carbide Mechanical Seals and Viton® Elastomers.




**Mody Pumps® Inc.**  
2166 Zeus Court, Bakersfield, CA 93308. USA  
Tel.: (661) 392-7600 • Fax: (661) 392-7601  
<http://www.modypump.com>  
E-mail: [sales@modypump.com](mailto:sales@modypump.com)

# mody


## ELECTRIC SUBMERSIBLE DRAINAGE PUMP

### G-900 SERIES 35HP (26kW)

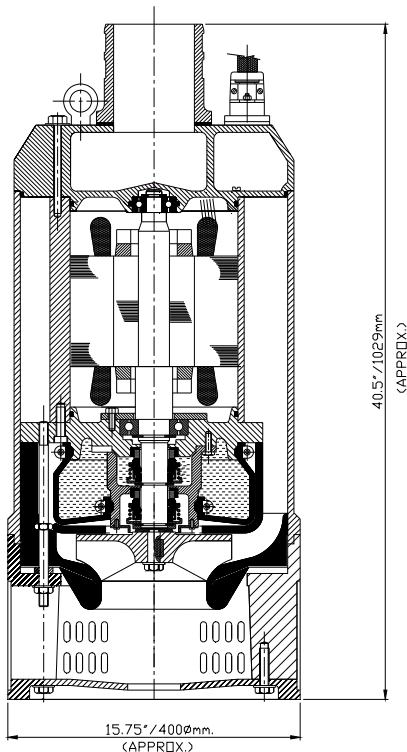

### PERFORMANCE CURVES

MODEL: G902T/906T (50/60 Hz)

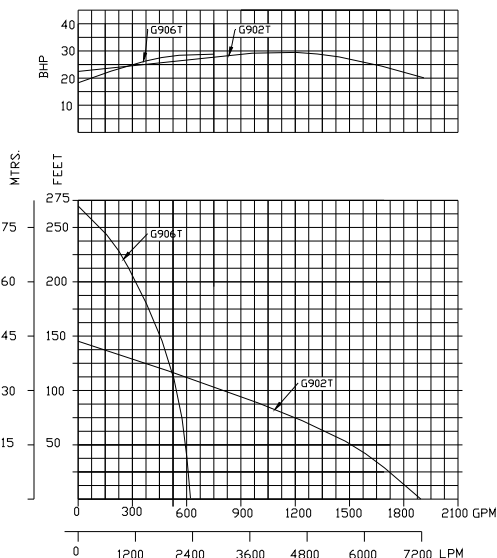

### G-900 SERIES

#### MATERIALS OF CONSTRUCTION AND ENGINEERING DATA

##### MOTOR

2-pole induction **continuous rated** motor with squirrel cage rotor.  
Stator insulation class 'H' (180°C) rated IP68  
Speed : 3400 RPM @ 60 Hz, 2800 RPM @ 50 Hz  
Power Rating : 35HP @ 60 Hz, 26kW @ 50Hz Full Load  
Current FLA: 44 Amps @ 460v. 51 Amps @ 400v.  
Max. temperature of the pump liquid : 104°F/40°C  
Max. start/stop per hour : 15  
Star - Delta Starting Optional

##### POWER SUPPLY

3 phase, 50/60 Hz, AC Supply. Available in any voltage frequency combination. (380/415/460/575/1000V)

##### BALL BEARINGS

Single row deep groove upper bearing. Double angular contact lower bearings. The bearings are enclosed with high temperature grease-containing special Anti-corrosion additive.

##### POWER CABLE

Waterproof/oil proof, rubber-insulated, neoprene-sheathed copper conductor flexible cable, 50ft. (15m) length standard. Type SOOW in North America, EPR in the Middle East and HO7RN in the EU. 6 Core or Control cable with thermal overloads optional.

##### SHAFT SEAL

Tandem Tungsten Carbide/Tungsten Carbide and Tungsten Carbide/Tungsten Carbide Mechanical seals wholly enclosed in a pressure compensated oil chamber.

##### CORROSION RESISTANT

Epoxy coated Steel Outer Casing  
Cast Aluminum Stator Casing  
Nitrile Rubber- Lined Diffuser/Wear plate.  
Shaft: 431 Stainless Steel  
Hardware: 304 Stainless Steel  
Impeller: Nitride Hardened 410SS to 56HRC is Standard.  
pH Range 5 - 8

##### STRAINER

304 Stainless Steel with 1-9/16" (25.5mm) X 3/8" (10mm) {G 902}, 3/8" (10mm) Round Holes {G 906}

##### SUBMERGENCE

Submergence below liquid surface min 5" (127mm) max. 65' (20m).

##### WEIGHTS (Approx. without cable) ~

G 902: 510lbs. (232Kg)  
G 906: 525lbs. (239Kg)