


886HT Single Component Bellows Seals

886HT ROTARY ASSEMBLY – Dimensional Data/Inch

SHAFT SIZE	OUTSIDE DIA	OPERATING LENGTH	SCREW HEAD PROTRUSION
A	B	C	D
1.000	1.562	1.687	.125
1.125	1.687	1.562	.125
1.250	1.812	1.562	.125
1.375	1.937	1.750	.125
1.500	2.170	1.750	.164
1.625	2.295	1.750	.164
1.750	2.420	1.750	.164
1.875	2.545	1.750	.164
2.000	2.670	1.750	.164
2.125	2.795	1.750	.164
2.250	2.920	1.875	.164
2.375	3.045	1.875	.164
2.500	3.187	1.875	.164
2.625	3.312	1.875	.164

886HT ROTARY ASSEMBLY – Dimensional Data/Metric

SHAFT SIZE	OUTSIDE DIA	OPERATING LENGTH	SCREW HEAD PROTRUSION
A	B	C	D
25mm	39.7	42.8	3.2
28mm	42.8	39.7	3.2
30mm	46.0	42.8	3.2
32mm	46.0	42.8	3.2
35mm	49.2	44.5	3.2
38mm	55.1	44.5	4.2
40mm	58.3	44.5	4.2
42mm	61.5	44.5	4.2
45mm	62.3	44.5	4.2
48mm	64.6	44.5	4.2
50mm	67.8	44.5	4.2
55mm	74.2	47.6	4.2
60mm	77.3	47.6	4.2
65mm	84.1	47.6	4.2

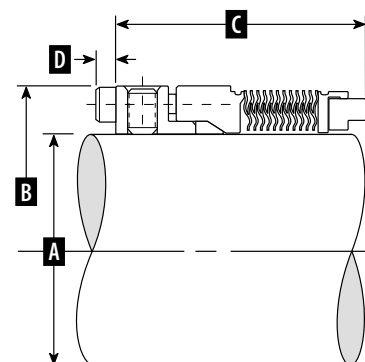

886HT STATIONARY ASSEMBLY – Dimensional Data/Inch & Metric

SHAFT SIZE	STAT. BORE DIA	STAT. LENGTH	CAVITY STEP DIA	CAVITY DEPTH	BORE DEPTH	CAVITY STEP DEPTH	NOSE LENGTH	PIN EXTRUSION
A	B	C	D	E	F	G	H	J
25mm	41.2	11.1	35.1	14.0	9.9	6.1	6.6	3.1
1.000	1.625	.437	1.384	.551	.390	.240	.261	.125
28mm	44.4	11.1	38.3	14.0	9.9	6.1	6.6	3.1
1.125	1.750	.437	1.509	.551	.390	.240	.261	.125
30/32mm	47.6	11.1	41.5	14.0	9.9	6.1	6.6	3.1
1.250	1.875	.437	1.634	.551	.390	.240	.261	.125
35mm	50.8	11.1	44.6	14.0	9.9	6.1	6.6	3.1
1.375	2.000	.437	1.759	.551	.390	.240	.261	.125
38mm	53.9	11.1	47.8	14.0	9.9	6.1	6.6	3.1
1.500	2.125	.437	1.884	.551	.390	.240	.261	.125
40mm	60.3	12.7	54.2	15.0	10.9	6.3	7.9	3.1
1.625	2.375	.500	2.134	.592	.431	.251	.314	.125
42mm	63.5	12.7	57.3	15.0	10.9	6.3	7.9	3.1
1.750	2.500	.500	2.259	.592	.431	.251	.314	.125
45mm	66.6	12.7	60.5	15.0	10.9	6.3	7.9	3.1
1.875	2.625	.500	2.384	.592	.431	.251	.314	.125
48mm	69.8	12.7	63.7	15.0	10.9	6.3	7.9	3.1
2.000	2.750	.500	2.509	.592	.431	.251	.314	.125
50mm	76.2	14.2	70.0	16.2	12.1	7.6	8.7	3.9
2.125	3.000	.562	2.759	.641	.480	.300	.346	.156
55mm	79.3	14.2	73.2	16.2	12.1	7.6	8.7	3.9
2.250	3.125	.562	2.884	.641	.480	.300	.346	.156
60mm	82.5	14.2	76.4	16.2	12.1	7.6	8.7	3.9
2.375	3.250	.562	3.009	.641	.480	.300	.346	.156
2.500	3.375	.562	3.134	.641	.480	.300	.346	.156
65mm	85.7	15.8	79.6	17.3	13.2	8.6	9.6	4.3
2.625	3.375	.625	3.134	.682	.521	.341	.379	.170

